




MANUFACTURER OF LIFTING DEVICES
FRENCH LEADER FOR JIB CRANES, GANTRY CRANES AND SPREADER BEAMS

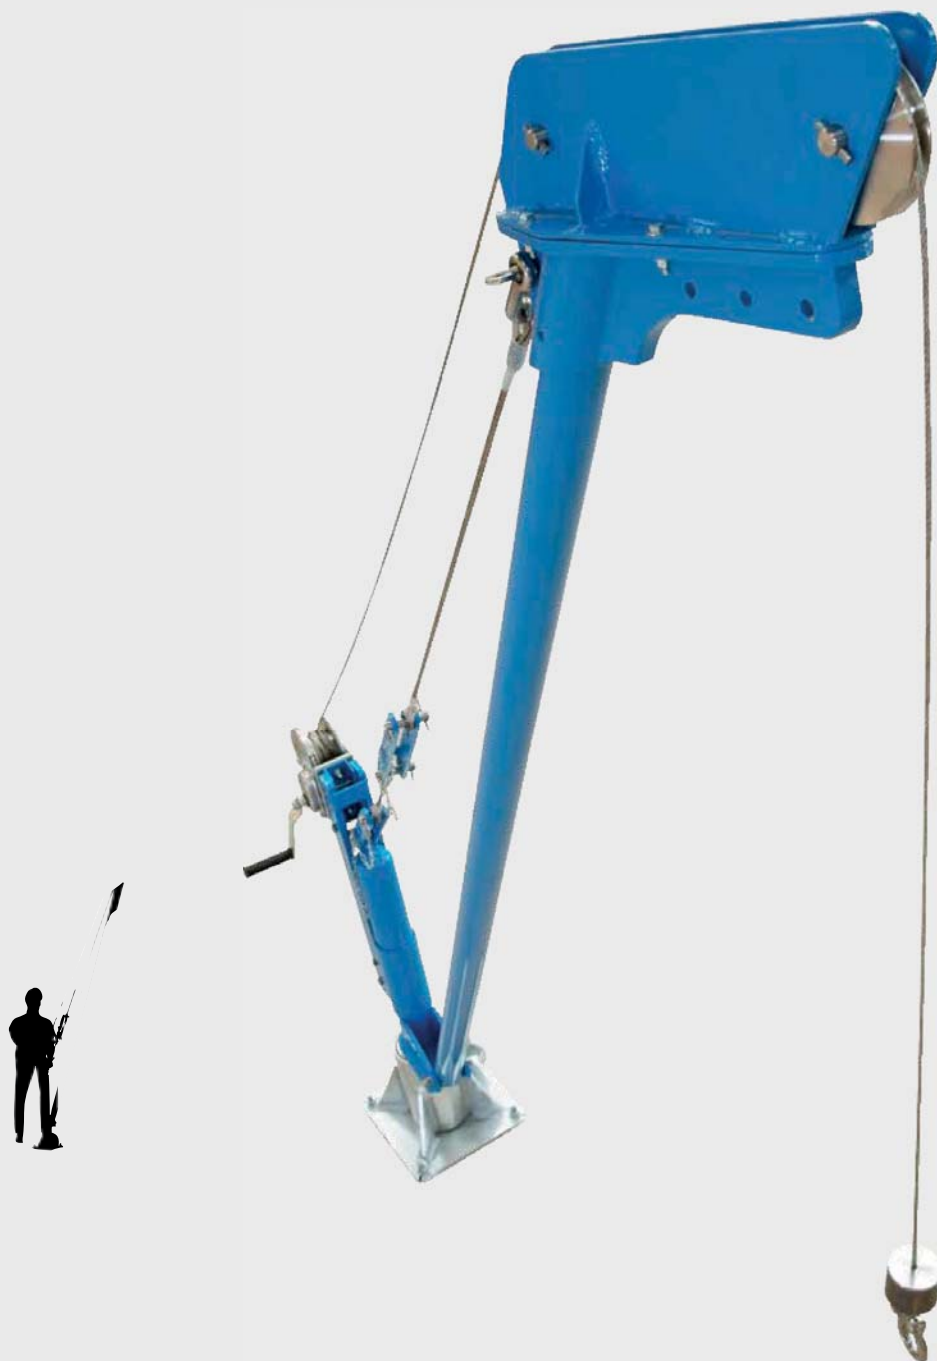

300

300T

500

500T

600

600T

COMALU

ALUMINIUM LIFTING EQUIPMENTS
ALU REMOVABLE JIB CRANE

ALU REMOVABLE JIB CRANE



ALU REMOVABLE JIB CRANE


Removable lifting solution, efficient and safe the jib crane COMALU contributes to improving the responsiveness of your teams.

Its aluminum frame guarantee you maximum portability and facilitates interventions on sites difficult to access. A single man can so proceed safely to the assembly of 3 elements which compose the jib crane COMALU. ■


1 JIB CRANE = 1 BAG OF 24 KG

Carry bag (included) gives your team the ideal tool for interventions on site quickly and efficiently. All the parts that make up the COMALU is grouped into one sturdy bag.

A single person can carry the jib crane, assemble, place on the base and make the lift safely.

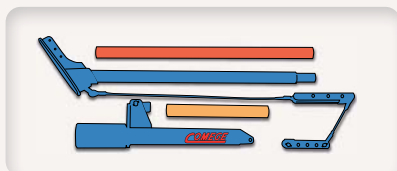


MOUNTING ON THE SOCKET

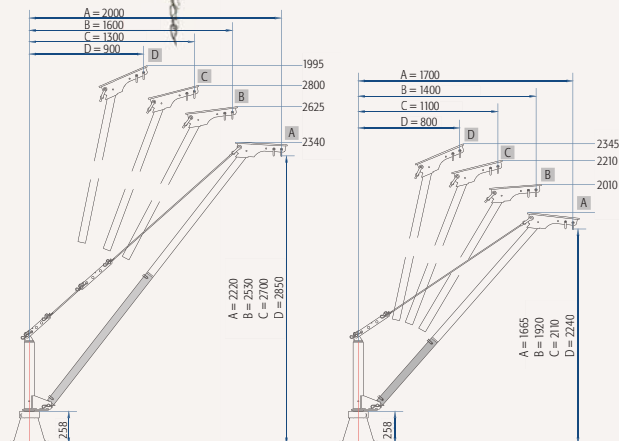

COMALU 300


1 JIB CRANE = 2 POSSIBILITIES

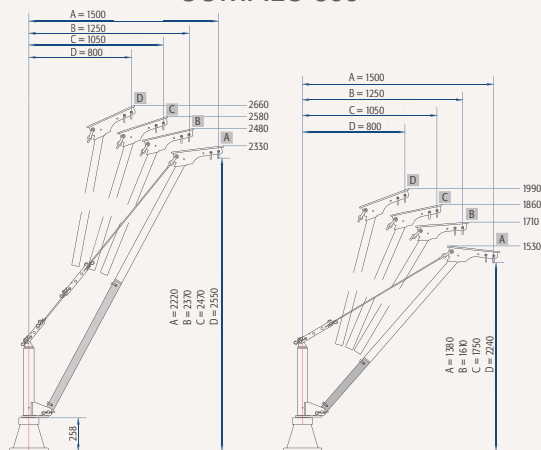

COMALU 500


1 JIB CRANE = 2 POSSIBILITIES

BASES




TO BE SEALED

ALU : 9 KG
GALVANIZED STEEL : 16 KG
STAINLESS STEEL : 17 KG



TO PEG

GALVANIZED STEEL : 18 KG



WALL BASE

GALVANIZED STEEL : 8 KG
STAINLESS STEEL : 8 KG



ASSEMBLY OF THE EXTENSION



ARM ASSEMBLY



FIXATION WITH PULLING THE PIN



IMPLEMENTATION OF THE HOIST


To meet all your mounting configurations, we offer a range of accessories to facilitate the implementation of our aluminum jib crane on your sites. The use of several sockets for the same jib crane greatly enhances handling costs



ALU REMOVABLE JIB CRANE WITH WINCH




COMALU 300 T

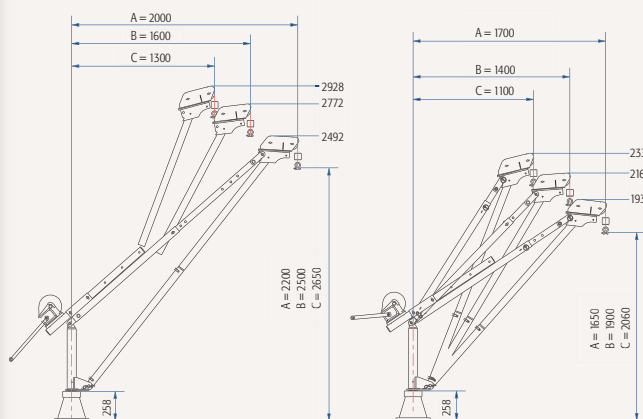


1 JIB CRANE = 2 POSSIBILITIES

COMALU 500 T

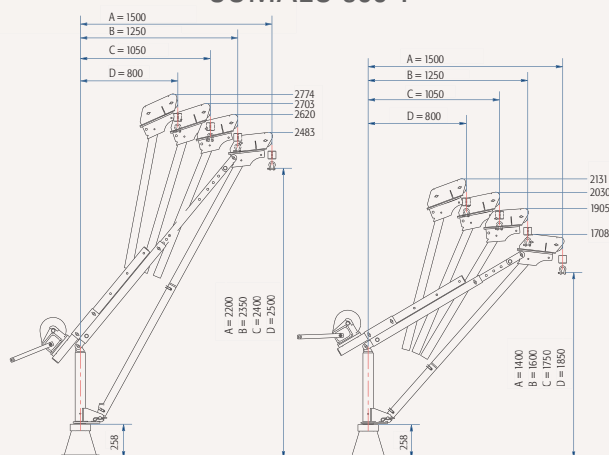

1 JIB CRANE = 2 POSSIBILITIES

EXTENSION

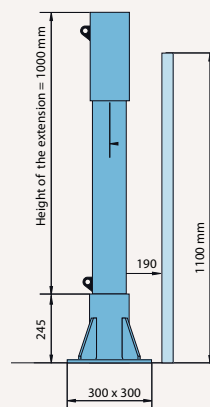



The extension allows the guardrail crossing or increase the lift height. It is for the user to ensure the proper anchoring and quality of the support of the socket before any use of jib crane.

ALU REMOVABLE JIB CRANE WITH WINCH

Get in standard 8 spanheight couples. It is the ideal jib crane for lifting loads in treatment plant or by the sea, and generally anywhere a standard jib crane can not be used. Secure sockets and enjoy the lightness of a single removable jib crane for many configurations. ■

1 JIB CRANE WITH WINCH = 2 BAGS OF LESS THAN 24 KG

To minimize the risks due to carrying heavy loads, the components of the COMALU are grouped into two bags robust. A single person can carry the jib crane, assemble on the socket and make the lift safely.

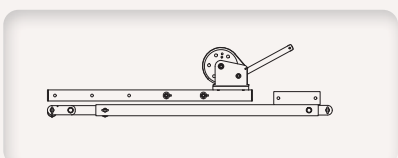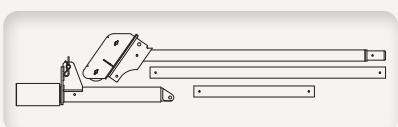

MOUNTING ON THE SOCKET



ARM ASSEMBLY



FIXATION
WITH PULLING THE PIN




CABLE ENTRY



MAKE LIFTING

COMALU 300

ALU INT EXT

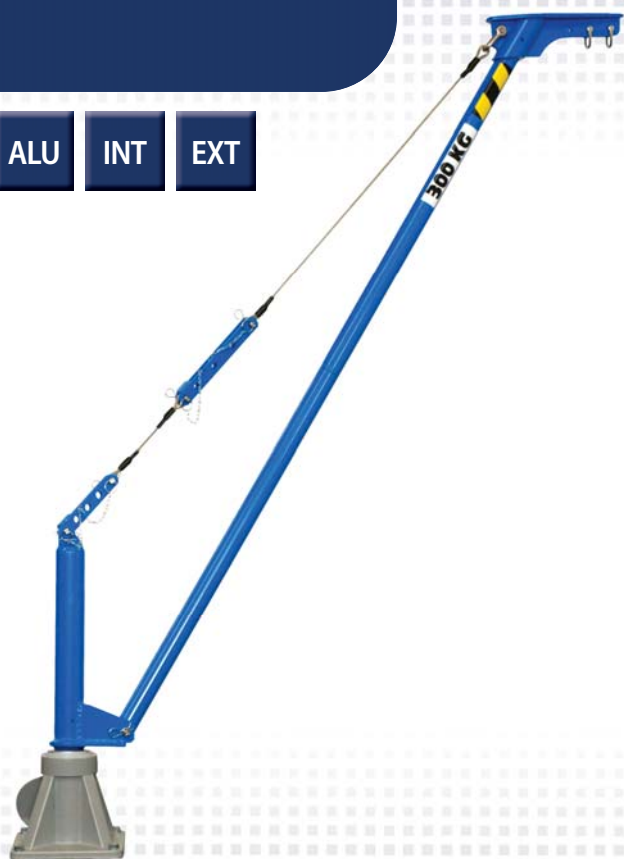

Description

- SWL = **300 Kg.**
- Adjustable span from 800 mm to 2 000 mm.
- 2 heights available (2 extensions provided).
- Jib crane in 4 parts / fast and easy installation.
- Set weight = less than 24 Kg.
- Bag provided.
- Different type of fixation.

COMALU 300T

ALU INT EXT



Description

- SWL = **300 Kg.**
- Adjustable span from 800 mm to 2 000 mm.
- 2 heights available (2 extensions provided).
- Jib crane in 4 parts / fast and easy installation.
- Set weight = less than 24 Kg.
- Bag provided.
- Different type of fixation.
- Hand lifting winch.

COMALU 500

ALU INT EXT



Description

- SWL = **500 Kg.**
- Adjustable span from 800 mm to 1 500 mm.
- 2 heights available (2 extensions provided).
- Jib crane in 4 parts / fast and easy installation.
- Set weight = less than 24 Kg.
- Bag provided.
- Different type of fixation.

COMALU 500T

ALU INT EXT



Description

- SWL = **500 Kg.**
- Adjustable span from 800 mm to 1 500 mm.
- 2 heights available (2 extensions provided).
- Jib crane in 4 parts / fast and easy installation.
- Set weight = less than 24 Kg.
- Bag provided.
- Different type of fixation.
- Hand lifting winch.

COMALU 600

ALU

INT

EXT



Description

- SWL = **600 Kg.**
- Adjustable span from 900 mm to 1 200 mm.
- Extension provided.
- Jib crane in 4 parts / fast and easy installation.
- Set weight = less than 24 Kg.
- Bag provided.
- Different type of fixation.

COMALU 600T

ALU

INT

EXT



Description

- SWL = **600 Kg.**
- Adjustable span from 1 050 mm to 1 200 mm.
- Extension provided.
- Jib crane in 4 parts / fast and easy installation.
- Set weight = less than 24 Kg.
- Bag provided.
- Different type of fixation.
- Hand lifting winch.

COMALU'S OPTIONS


SOCKETS



TO SEAL

Galvanized steel

Stainless steel




TO FIX ON THE FLOOR

Aluminium


Galvanized steel

Stainless steel



WALL MOUNTED

Galvanized steel



EXTENSIONS

Height 600 mm


Height 800 mm

Height 1 000 mm

Height 1 250 mm



	Capacity	Maximum range
	Kg	M
COMALU 300	300	2
COMALU 500	500	1,5
COMALU 600	600	1,3

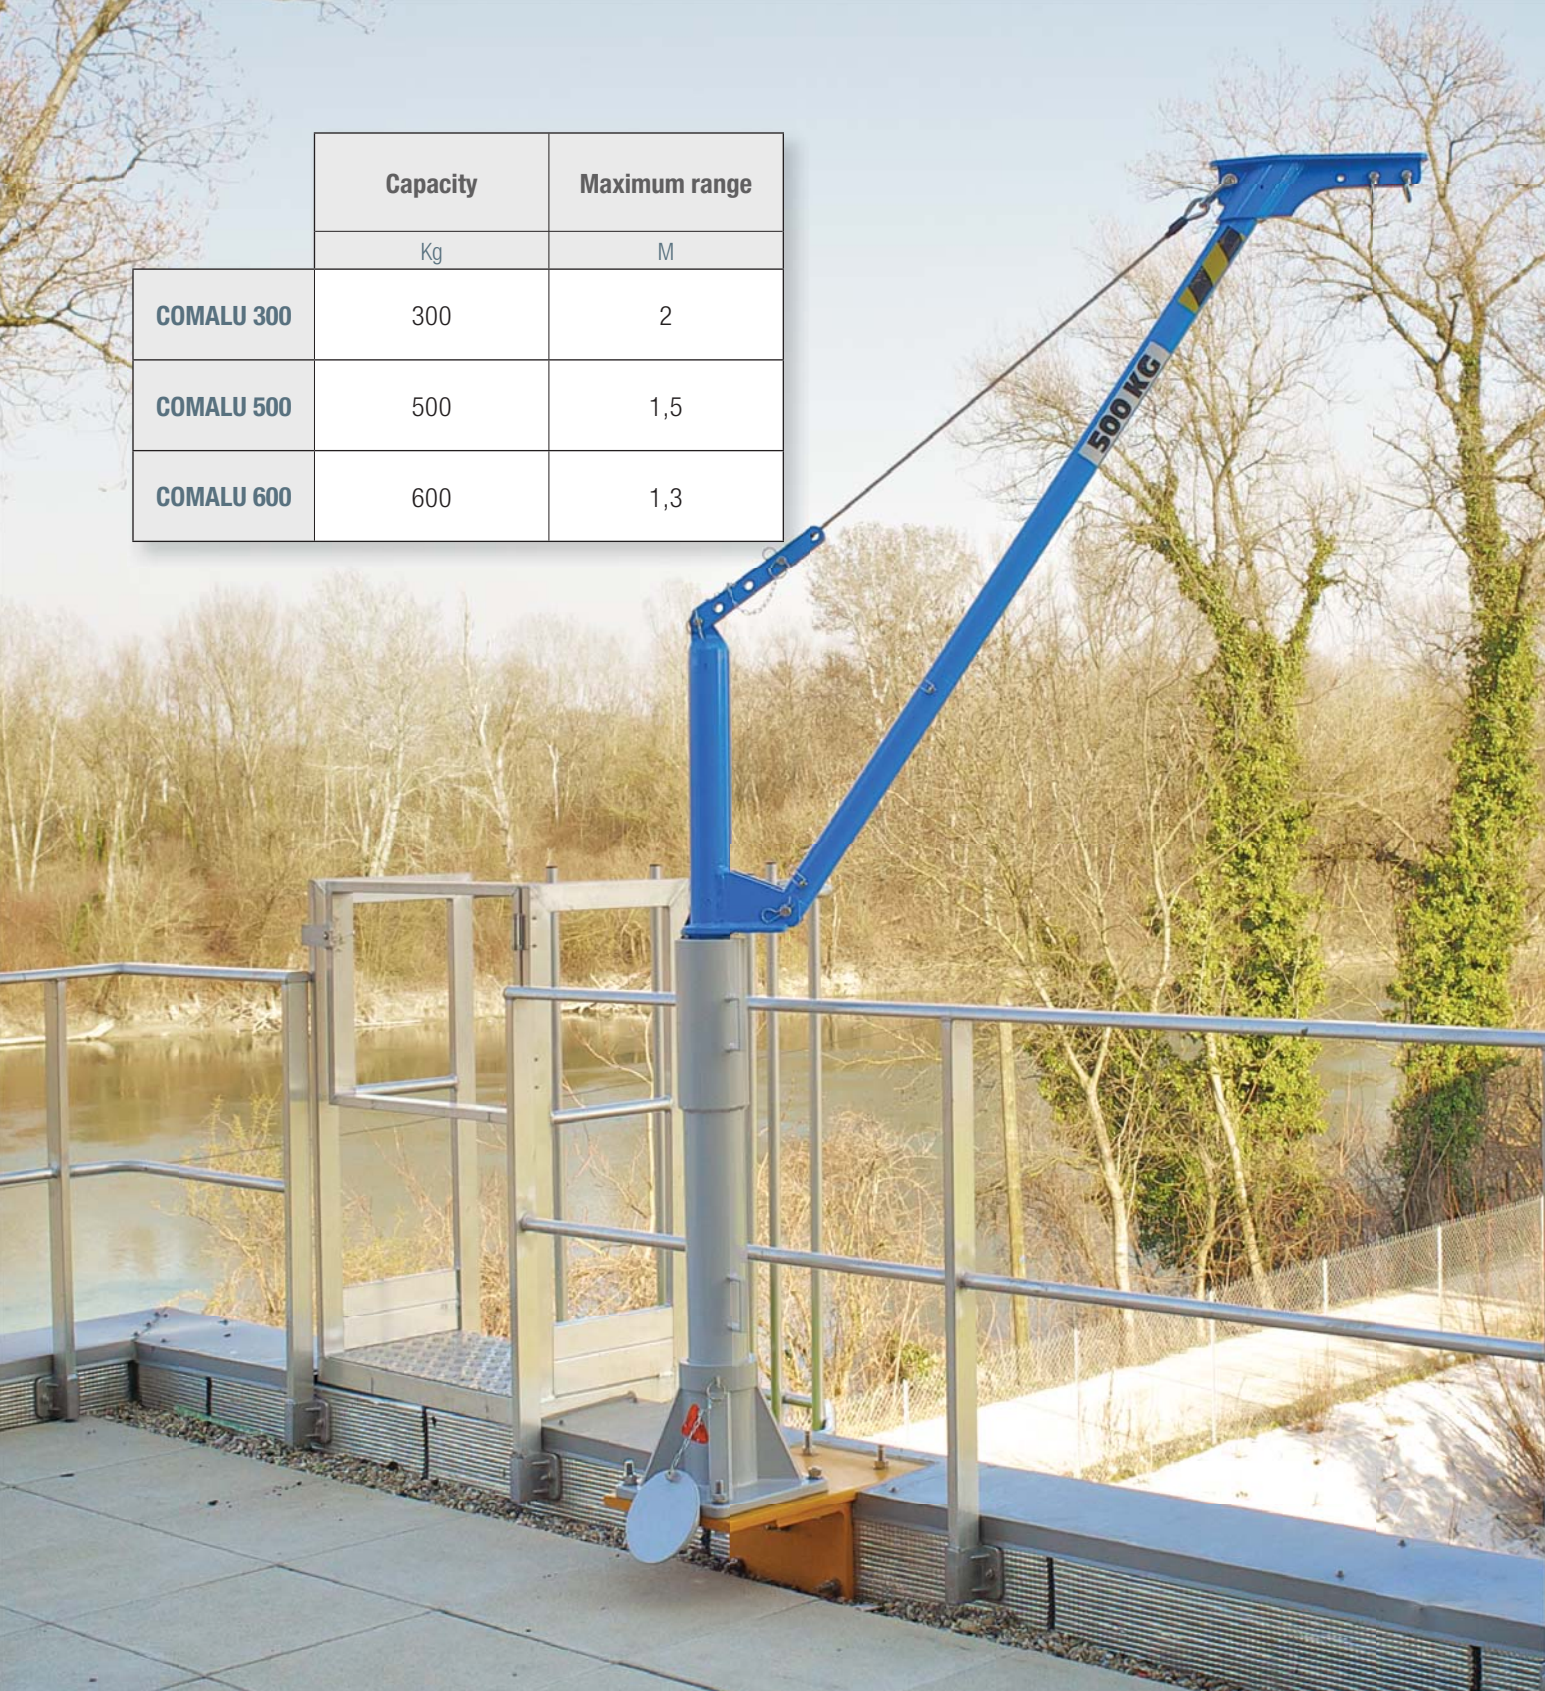

COMEGE 

MANUFACTURER OF LIFTING DEVICES
FRENCH LEADER FOR JIB CRANES, GANTRY CRANES AND SPREADER BEAMS

Crane Partner AS
Jekteviken 6, 5006 Bergen,
Norway
P: +47 55 32 58 00
E: post@cranepartner.no
W: www.cranepartner.no